



Forum Inżynierii Materiałowej Materials Engineering Forum

- The Materials Engineering and Metallurgy Committee of the Polish Academy of Sciences
- Polish Materials Science Society

Dealloying as an advanced and facile synthesis technique for the production of nanoporous metals

Deepti Raj, Kirti Tiwari, Federico Scaglione, Paola Rizzi*

University of Torino, Department of Chemistry, Italy

Nanoporous metals represent a new class of materials with promising properties as actuators, storage and conversion of energy, electrodes for electrocatalysis and surface-enhanced Raman scattering (SERS). They are constituted by a scaffold of interconnected ligaments with pores in between. They can be fabricated by electrochemical or chemical dealloying: the less noble elements are selectively dissolved while the noble components reorganize in ligaments by surface diffusion.

In this work, different examples of applications are reported to show the versatility of these materials in terms of properties and possible applications: nanoporous Au (NPG) and nanoporous Pd as substrates for Surface Enhanced Raman Spectroscopy (SERS) with ultra-low detection limit; nanoporous Ti as biocompatible material with enhanced antibacterial properties.

The production of Nanoporous gold (NPG) was addressed starting from different precursors, both crystalline and amorphous. The synthesis was performed by both free corrosion and electrochemical dealloying, in different acidic media. XRD and SEM analyses were performed to check the final morphology of the produced samples (in Fig 1 an example of SEM image of NPG morphology).

SERS activity of NPG was investigated using 4,4'-bipyridine as a probe molecule. Such a microstructure showed homogenous SERS response in terms of average enhancement all across the surface, as demonstrated by SERS mapping measurements. NPG samples produced by dealloying Au₂₀Cu₄₈Ag₇Pd₅Si₂₀ amorphous ribbons in a mixture of nitric and hydrofluoric acid show a SERS detection limit of 10⁻¹⁶ M. The signal was strongly enhanced and, by exploiting SERS maps, it was found to have a signal highly homogeneous on the surface. The extremely high enhancement obtained is attributed both to the small size of ligaments and crystals of which they are made.

A novel Ti-based amorphous alloy was developed containing biocompatible elements (TiCuZrFeSnAg) and metallic glass ribbons were synthesised by melt spinning. To produce antimicrobial implant materials, the surface was modified using chemical dealloying in an acidic media for producing a nanostructured topography. The effect of dealloying in different electrolyte was investigated. The surface morphology and composition of dealloyed samples was characterized using XRD, SEM, XPS, TEM and AFM analysis. The formation of nano porosities and ligaments mainly related to the formation of TiO₂ on the sample surface was observed. Different morphology were produced by changing the parameters used for the synthesis, i.e. electrolyte, concentration, temperature and time. The produced morphologies enable a change in wettability and hemocompatibility of the samples, with an increased hemocompatibility with the formation of a nanoporous structure on the surface.

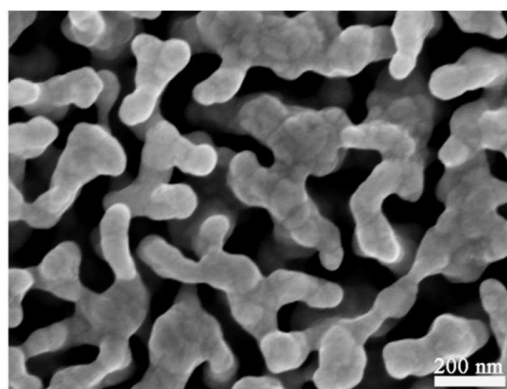


Fig 1: SEM image of NPG surface morphology



Institute of Metallurgy and Materials Science
Polish Academy of Sciences



Silesian University
of Technology

Warsaw University
of Technology